


# CABLE OPERATED CHAIN HOLDER

*For Single, Multiple or Double Pitch Chains*

MADE IN U.S.A.

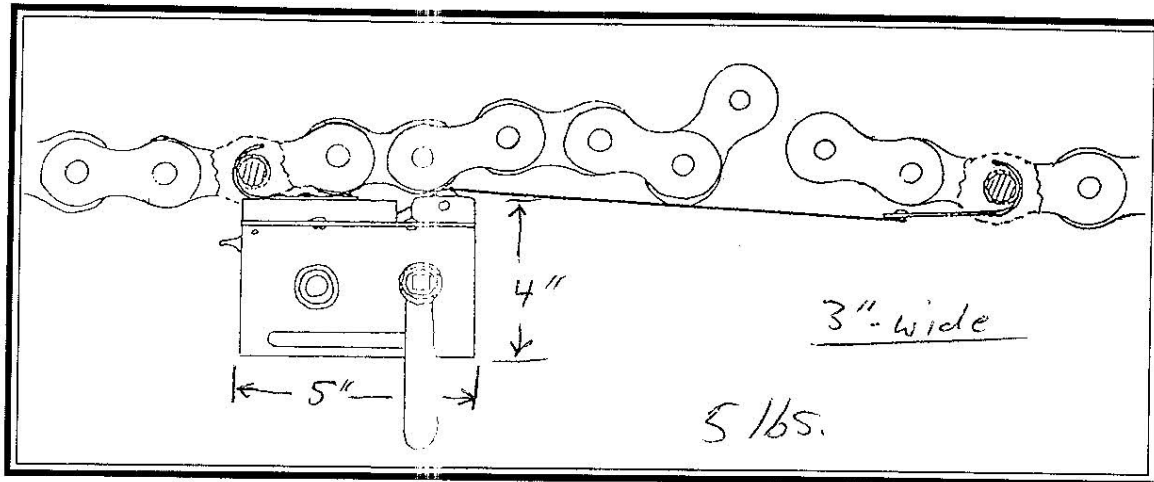

FOR #80 thru #240 ROLLER CHAIN  
(1" thru 3" Pitch)

MOST CONVEYOR AND ENGINEERED CHAINS  
WITH A WIDTH OF 5/8" OR WIDER BETWEEN INSIDE LINKS

## A MUST WHERE ROLLER CHAIN IS USED

This tool was designed to hold the chain in place on the sprockets while repairing chain. Place hooks on rollers past opposite sides of link or links to be removed or replaced. The slack in the cable is taken up with a wrench until the chain between the hooks is relieved of tension. This will allow the operator to remove the link, or links, with a roller chain breaker. Then insert a new master or replacement link, or links. The cable is released with the lock lever pawl and the tool is removed.

ALLOWS CHAIN TO BE PULLED, OR RELEASED WITHOUT READJUSTING  
SPROCKETS WHEN REMOVING OR INSERTING LINKS.

**NOTE:** *On multiple strand chain a second chain holder will aid in alignment of the chain.  
Tool is not made to support total weight of chain, only to take up slack.  
Never use extension on handle.*

Patent #5,752,377  
ESTABLISHED 1947

## PATTON TOOL CO., INC.

67 Mainline Drive, Westfield, MA 01085  
Telephone (413) 564-5255 • Fax (413) 564-0018  
E-mail: PATTON-TOOL@WORLDNET.ATT.NET  
Web Site: [www.pattontool.com](http://www.pattontool.com)